

# Liftronic® Mobile

The Intelligent Device  
for Handling you  
can easily move  
wherever you need



## Advantages

- ✓ One lift assist device available to **suit most electric pallet truck** models on the market
- ✓ **Easy and safe** to move around
- ✓ **Easy interchange of grippers** for handling different types of load
- ✓ **Easy battery replacement**
- ✓ **Versatile:** from mobile to fixed position - very easy with optional base platform

## Safety



**Acoustic alarm**

If the arm is not secured when moving the lift assister, a sensor activates an acoustic alarm



**Arm**

In case of rope damage a mechanical safety device prevents the arm from lowering



**Battery**


In case of low battery power, the system allows the arm to be moved to a rest or unload position; a low battery message will then be displayed



**Switch-off**

In case of accidental switch-off, the system allows arm to be moved to a rest or unload position

## Suitable for different load grippers

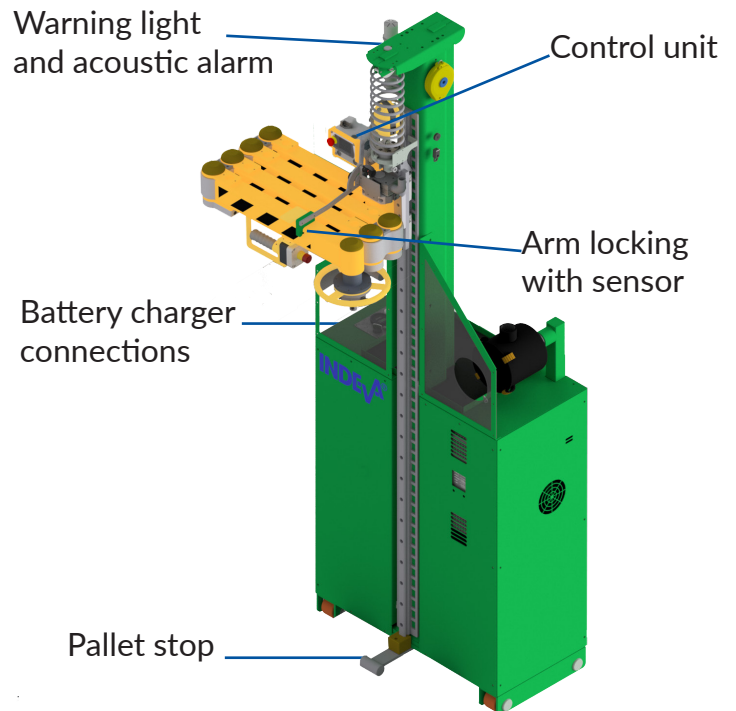

Very agile



Precise




Ergonomic



Zero Gravity


### 4 JOINTS

3 on the arm + 1 on the gripper coupling

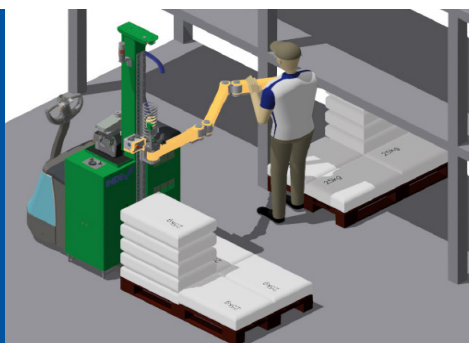

### ORIENTATION

On the left or on the right according to the work area side

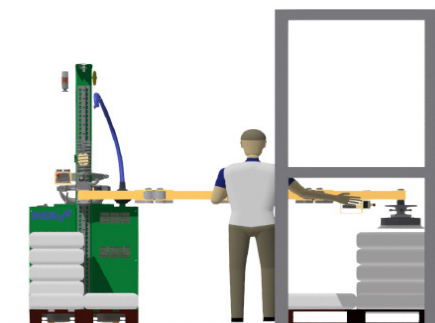

### SWIVEL JOINT

On the end of arm for continuous rotation around the gripper axis



## Technical data

- **Gross load capacity:** 50 kg with a mechanical gripper - 25 kg with a vacuum gripper (including gripper)
- **Arm length:** 2530 mm
- **Column height:** 2 choices: 2300 - 2700 mm
- **Vertical stroke:** 1500/1900 mm - based on column height
- **Overall size:** 812 x 851 x 2390/2790 mm (depends on column height)
- **Vacuum gripper:** air through the arm, no pipes