


PN SERIES: PN250 CEILING / RAIL MOUNTED




MAX GROSS
CAPACITY
UP TO 300 kg

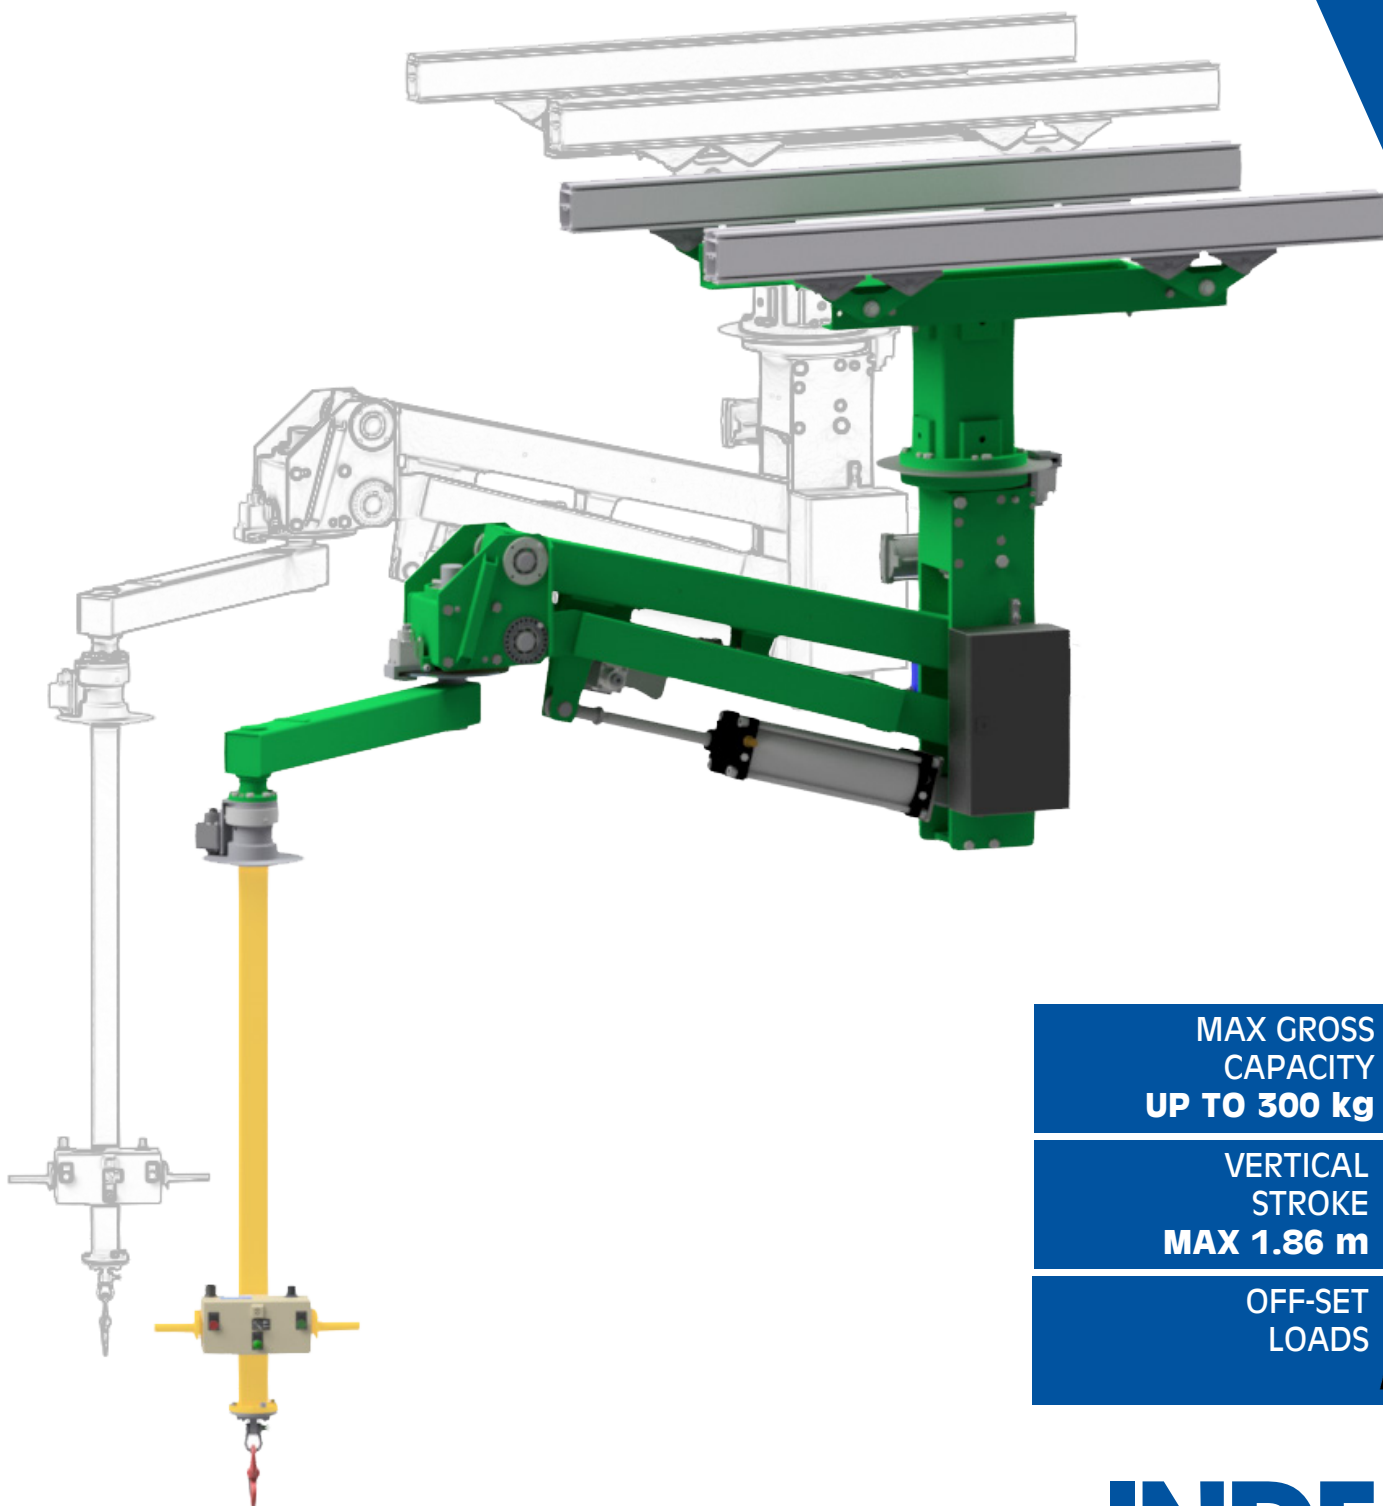

VERTICAL
STROKE
MAX 1.86 m



OFF-SET
LOADS



INDEVA[®]

INTELLIGENT DEVICES FOR HANDLING

PN SERIES: PN250 CEILING / RAIL MOUNTED

Model		PN250 STD		PN250 L	
Type		PN250	PN250 + ⁽⁴⁾	PN250L	PN250L + ⁽⁴⁾
SQ⁽¹⁾ (Max Load capacity)	kg	250	300	150	180
Min Load capacity	kg	15	15	15	15
L1	mm	1565	1565	1965	1965
L2	mm	1040	1040	1535	1535
R1*	mm	2605	2605	3500	3500
R2	mm	1109	1109	1263	1263
RH	mm	-	960	-	960
A⁽²⁾	mm	4172	4172	4492	4492
B⁽²⁾	mm	1536	1536	1656	1656
C⁽²⁾	mm	480	480	600	600
D Vertical stroke	mm	1451	1451	1866	1866
E⁽²⁾	mm	2007	2007	2020	2020
Weight (with column and load)	kg	723	900	661	837
Fv max⁽³⁾	daN	829	1030	758	960
Mges max⁽³⁾	daNm	1317	1300	1290	1300


(1) Nominal load capacity SQ is determined with a compressed air supply of minimum 0,65 MPa (6,5 bar) and standard off-set load.

(2) Within certain limits, these values can be modified to suit specific requirements.

(3) Values including the relevant safety factor, according to UNI EN 13001.

(4) With counterweights.

* Most common configurations. Other arm lengths available, all values change accordingly.

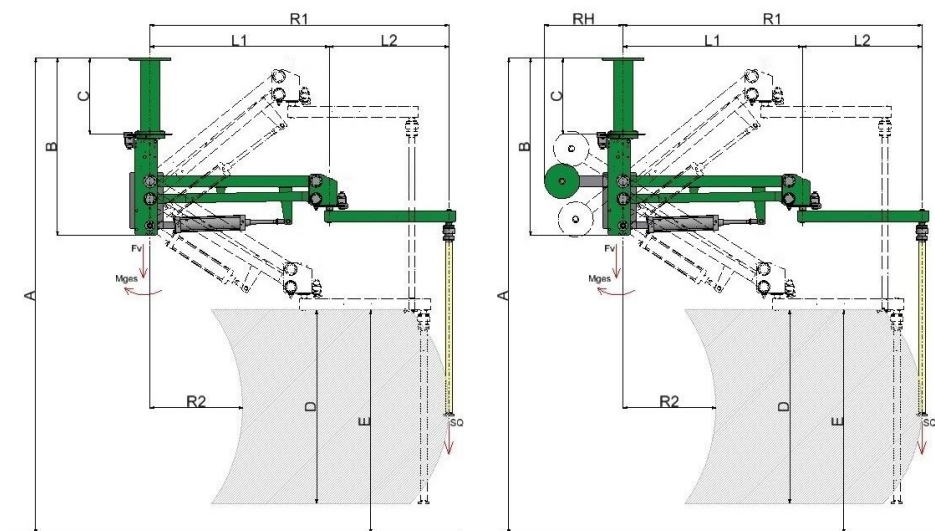

GENERAL TECHNICAL SPECIFICATIONS

Standard features:

- Air pressure 0,65 MPa (6,5 bar)
- Noise level < 70 dB (A)
- Lift speed from 15 to 30 m/min
- Main column axis brake
- Intermediate joint axis brake
- Continuous column rotation (not available with motorized sliding trolley)
- Slow descent in case of pressure failure
- Load balancing: standard, 1 load preset

Available options:

- Continuous swivel joint on the tool axis
- Lifting capacity limiter
- Brake for up/down movement
- Special painting
- Sliding trolley
- Limit switch for the main and intermediate joint axis
- Load balancing: adjustment system for different load weights

Due to continuous product improvement, these specifications may change without notice.

This document is property of INDEVA S.p.A.; any partial or full reproduction without written authorization by the owner is prohibited.

WORKING ENVIRONMENT REQUIREMENTS

- Relative humidity rate: 30% to 90%
- Working temperature 5 to 50 °C

CONFIGURATION CHART

